



# Fireplace, Wood Burning Stove Questionnaire

Named Insured:  
Location Address:

Policy #:

Attach Photo – Complete in Full

<b>FIREPLACE INSERT</b> COMPLETE QUESTIONS 1-6	<b>FIREPLACE (BUILT-IN)</b> COMPLETE QUESTIONS 1-4	<b>FREE STANDING FIREPLACE &amp;/OR STOVE</b> COMPLETE QUESTIONS 1-6
---	---	---

1. Type of Heating Equipment:
 

<input type="checkbox"/> Built-In Fireplace	<input type="checkbox"/> Free Standing Fireplace
<input type="checkbox"/> Free Standing Stove	<input type="checkbox"/> Furnace Supplement
<input type="checkbox"/> Other:	
  
2. Is this unit a major heat source for the dwelling?    Yes  No
  
3. Were chimney and equipment installed by a contractor?    Yes  No   
 If yes, Name and Address if other than the home builder:
  
4. Chimney Information – Type of Chimney
 

<input type="checkbox"/> Masonry with tile flue liner
<input type="checkbox"/> Prefab metal chimney (UL approved)
<input type="checkbox"/> Pellet
<input type="checkbox"/> Other:

When was chimney last cleaned?

How often is chimney cleaned?

Cleaned by whom?

- Insured                       Chimney Sweep\*                       Contractor\*

\*Name:

\*Address:

Is more than one unit vented into the same chimney flue? Yes  No

**THE FOLLOWING QUESTIONS SHOULD BE ANSWERED FOR FREE STANDING FIREPLACES AND/OR STOVES.**

Brand Name:

Year Purchased:

5. Does your free-standing heating unit have the minimum clearances of:
- Yes  No  36" between the stove box and any unprotected combustible surface in all directions
- Yes  No  4" between stove and floor
- Yes  No  Pad under stove
- See Diagrams Below

6. Stove pipe information – Diameter of pipe?

Distance from the nearest combustible surface?

Are pipe sections or joints fastened with metal screws? Yes  No

Does the pipe pass through floor, walls or ceilings? Yes  No

If yes, is it protected with a:

- Ventilated Thimble
- Fuel Connector
- Fire Stop Spacer



Is more than one unit vented into the same chimney? Yes  No

Insured signature:

Date:

Agent's signature:

Date:

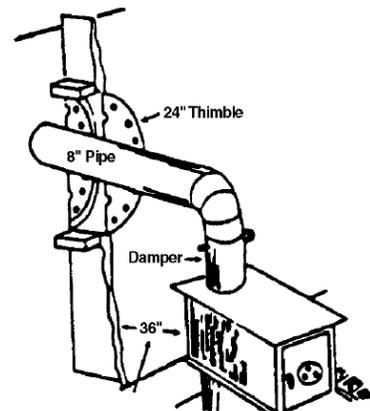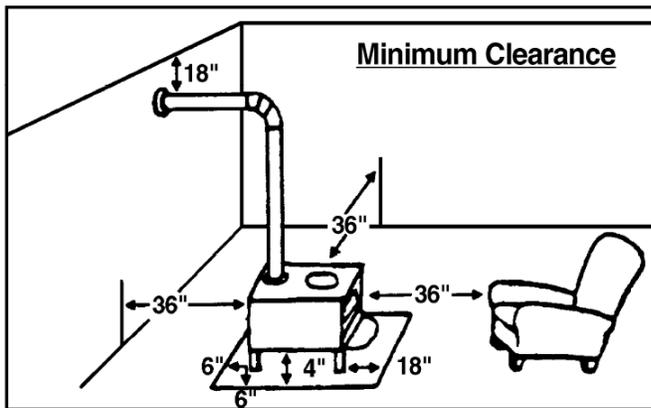

THESE CLEARANCES CAN BE REDUCED IF YOUR FLOOR OR CONBUSTIBLE WALL IS PROTECTED BY BRICKS WITH MORTAR OR BY METAL COVERED ASBESTOS STOVE BOARD. THE PAD UNDER YOUR STOVE SHOULD EXTEND 18" BEYOND THE ASH REMOVAL DOOR OR YOUR STOVE.